



CAR BENCH[®]
CAR BENCH INTERNATIONAL SPA

ONLY THE BEST CAN BE NUMBER ONE

RIVETING TOOLS



**IDEAL FOR AUTOMOTIVE
REPAIR USING (SPR)
SELF PIERCING RIVETS,
FLOW FORM RIVETS,
BLIND RIVETS.**



Operator adjustable compression force from 20 Kn to 90 Kn

USB Connection and download certificate

MAIN FEATURES

- Electro-hydraulic pump
- Automatic retract once set force is obtained
- C-Arm grip handle
- C-Arm various models available
- Pressing time regulation
- Complete of Push Pull actuator
- Removal of rivets with standard dies
- Super silent
- Complete of traceability software
- Portable use with 18V DC lithium ion batteries or with via power network cable



Bodyshop repair tool
with Ford approval

Bodyshop repair tool
with Aston Martin approval



Battery



USB cable



Built in software with end of riveting processing proof traceability certificate.




Suitcase with specific dies for:
Ford, Land Rover, Mercedes, Bmw, Jaguar, Maserati, Porsche, Audi Volkswagen



C-frame
Made in steel
Depth 130 mm,
usable on
standard piston.



C-frame
Made in steel
Depth 240 mm,
usable on
standard piston.

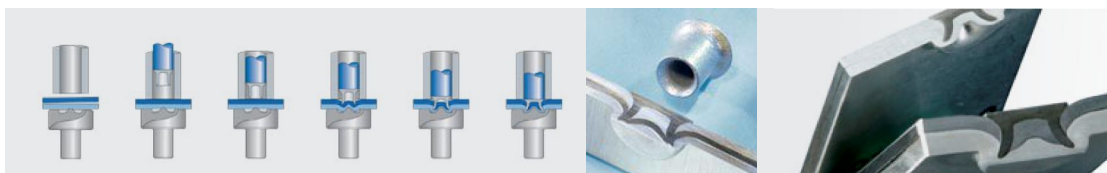

Self piercing rivets




Flow form rivets

RIVETING TOOLS



TECHNICAL FEATURES

Actuation method	Electrohydraulic
Light and compact pump housing	3.8 kg (8.37 lb)
Electronic regulation	da 200-700 bar (from psi 2900-10150)
Compression force adjustment	20-90 Kn
Compression time	3 - 5 sec
Battery voltage	18V DC
Type of battery	Ioni di litio (Li-ion)
Battery capacity	3,0 Ah
Rotation of C-frame	360°
Depth of C-frame	40 mm, 130 mm, 240 mm
Acoustic noise level	dB < 70
Operating temperature	-10° C / +50° C
Usage between battery charges	380 rivets
Charging time	Approx 50 min

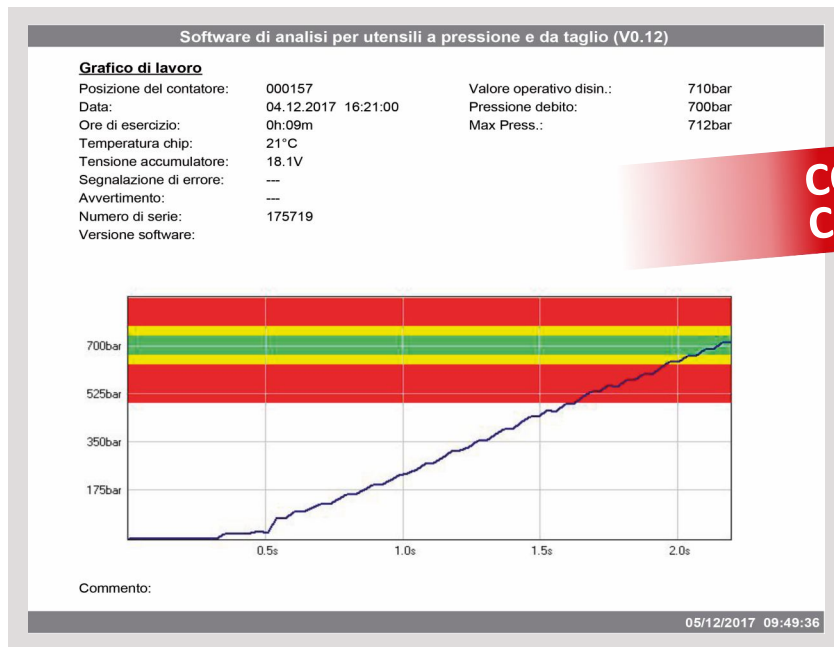

**CONFORMITY
CERTIFICATION**

**CAR BENCH
TRAINING ACADEMY**

REPAIR
METHODS

CAR BENCH
EQUIPMENT TRAINING

CUSTOMIZED
OEM TRAININGS



Car Bench International S.p.A.
Via Dorsale, 22 - 54100 Massa (MS) - ITALY
info@carbench.it - ph. +39 0585 251261
www.carbenchinternational.com